

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending


Sliding resistance

This data is the measurement values under the following conditions: These are not guaranteed values because values vary with the installation method and pressurizing direction.

(Test conditions)

Cylinder type SCM-U
Cylinder installation Vertical attitude
Cylinder speed 10 mm/min. (drive with external motor)
Cylinder pressure direction Head end (rod end is atmospheric release.)

Sliding resistance ($\phi 20$ to $\phi 50$)

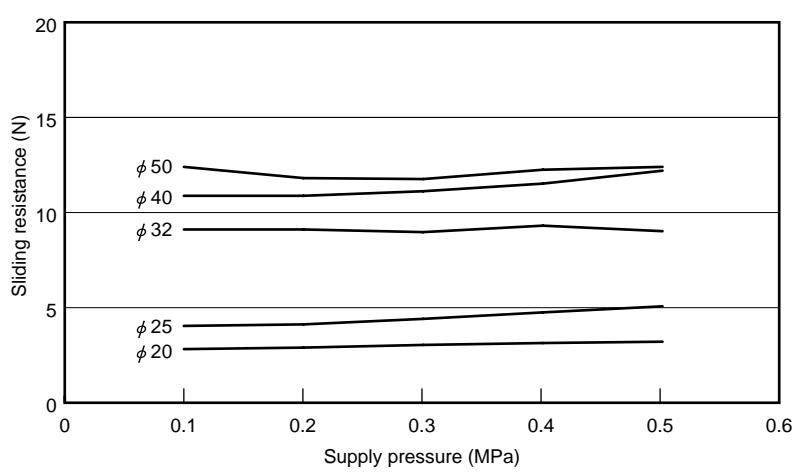

Sliding resistance ($\phi 63$ to $\phi 100$)

